



# PRODUCT DATASHEET

**Confidex Carrier™**

## CONTENTS

1.	PRODUCT DESCRIPTION .....	2
1.1	SPECIFICATION DATA.....	2
1.2	DIMENSIONS .....	2
1.3	ELECTRICAL PERFORMANCE.....	3
1.4	RADIATION PATTERNS.....	4
1.5	RESISTANCE AGAINST ENVIRONMENTAL CONDITIONS* .....	4
1.6	SUPPORTED SERVICES .....	4
1.7	INFORMATION OF USED MATERIALS.....	5
1.8	POSSIBLE APPLICATIONS.....	5
2.	INSTALLATION INSTRUCTIONS.....	5
2.1	LABEL ORIENTATION AND APPLICATION .....	5
2.2	PROTECTION OF TAG DURING USAGE .....	6
3.	ORDER INFORMATION .....	7

## 1. PRODUCT DESCRIPTION


Confidex Carrier™ is a special label with a strong grip for plastic surfaces. It can be easily attached to various containers and with its excellent performance, it provides new visibility to asset tracking applications. By offering a reliable EPC Class1 Generation2 compliant tag solution, Confidex Carrier™ provides fast return of investment where identification in the supply chain, inventory and cleaning management are critical.

### 1.1 SPECIFICATION DATA


<b>Device type</b>	Class 1 Generation 2 passive UHF RFID transponder
<b>Air interface protocol</b>	EPCGlobal Class1 Gen2 ISO 18000-6C
<b>Operational frequency</b>	860-960 MHz
<b>IC options</b>	NXP UCODE G2XM (white) NXP UCODE G2XL (transparent)
<b>EPC memory</b>	240 bit
<b>Extended memory</b>	512 bit (in G2XM)
<b>Read range</b>	up to 4-5m / 13-16ft, reader power 2W ERP (dependent on application)
<b>Face material</b>	White or transparent PET
<b>Background adhesive</b>	High performance acrylic adhesive
<b>Weight</b>	1 g
<b>Delivery format</b>	On reel
<b>Pitch on reel</b>	20.32mm / 0.8"
<b>Amount on reel</b>	2000pcs (default)
<b>Reel core inner diameter</b>	76mm / 3"
<b>Product is RoHS compliant</b>	

### 1.2 DIMENSIONS


<b>General dimensions (Width x Height x Thickness)</b>	73mm x 8mm x 0,2mm (2.87" x 0.31" x 0.01")
--	--

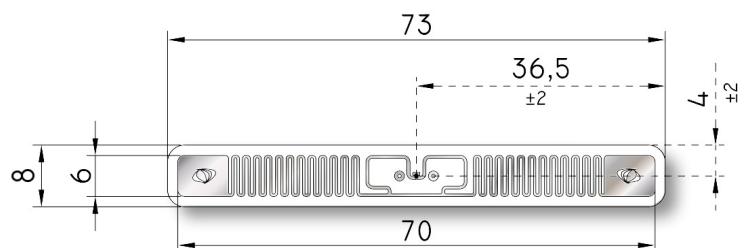

### Cross section

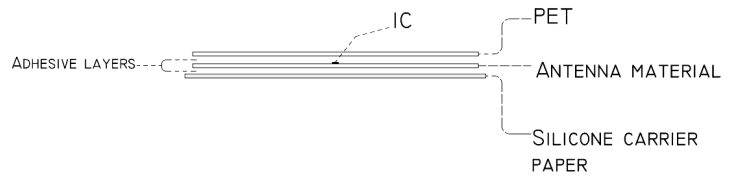


### Delivery in reel format

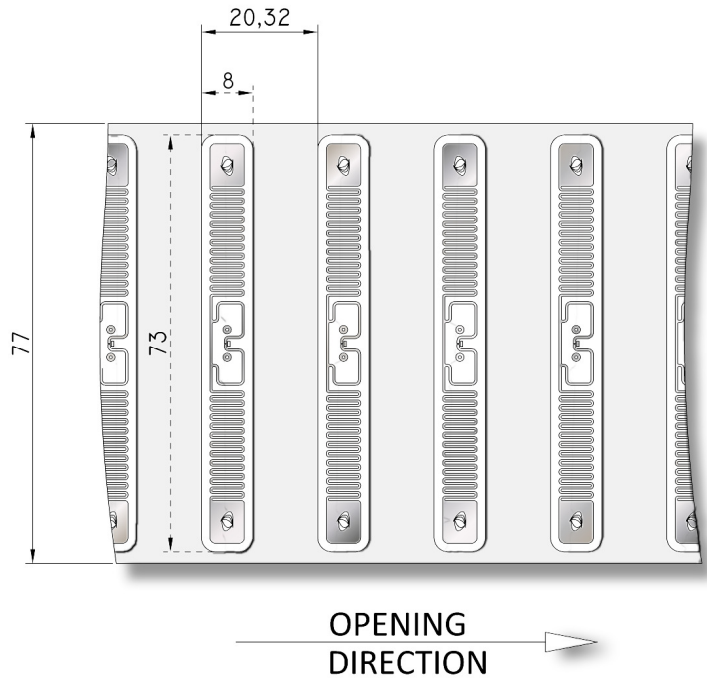

## 1.3 ELECTRICAL PERFORMANCE


### Carrier G2XM and G2XL attached to HDPE plastic

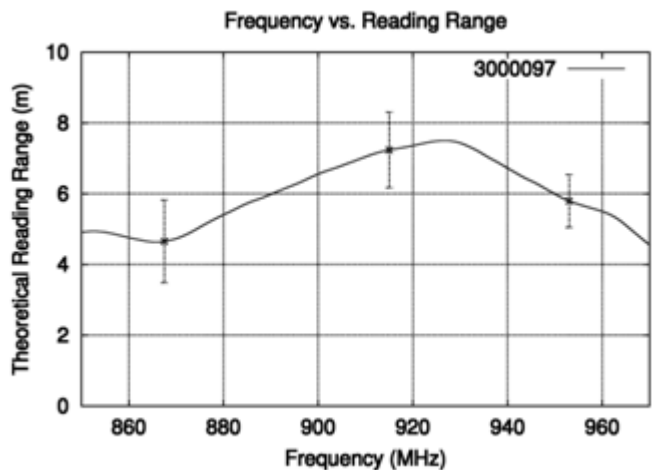

\*Presented reading ranges are calculated values in non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power: EU 865-868 MHz (2W ERP), US 902-928 MHz (4W EIRP), and JPN 952-954MHz (4W EIRP). Variation of 3 $\sigma$  from test batch marked in the picture.

## 1.4 RADIATION PATTERNS

Estimated radiation pattern when tag orientation towards reader antenna is optimized.

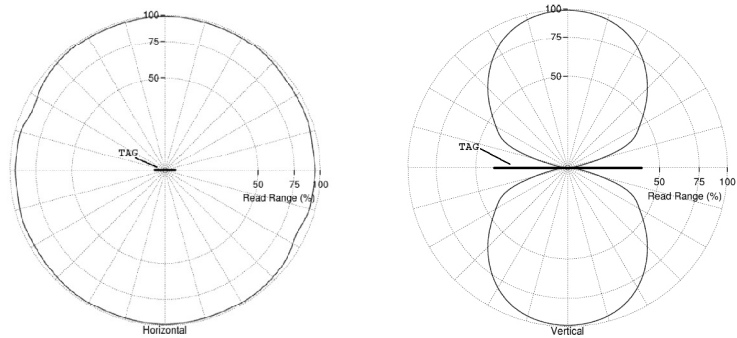

## 1.5 RESISTANCE AGAINST ENVIRONMENTAL CONDITIONS\*

Typically values are valid for all tag versions. If not, applicable IC versions are marked

<b>Operating temperature</b>	-35°C to +85°C (-31°F to +185°F)
<b>Ambient temperature</b>	-35°C to +90°C (-31°F to +194°F)
<b>Storage condition</b>	2 years in +20°C / 50% RH (shelf life for adhesive)
<b>Water resistance</b>	Good, tested for 5 hours in 1 meter deep water
<b>Washing resistance</b>	Good, tested in: 300 cycles with water at 175bar with temperature of +80°C/+176°F
<b>Chemical resistance</b>	No physical or performance changes in: - Salt water (salinity 10%), tested in 168h exposure - NaOH (10%, pH 13), tested in 24h exposure - Sulfuric acid (10%, pH 2), tested in 24h exposure - Acetone, tested in 30min exposure - Motor oil, tested in 168h exposure
<b>Expected lifetime</b>	Years in normal operating conditions

\* Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.

## 1.6 SUPPORTED SERVICES

There is several personalization options available for Confidex Carrier™ in order to “fine tune” the tag to match with the application requirements:

- Pre-encoding
- Customer specific printing including various barcode types and logos. Printed data can be matched with EPC.

For personalization specifications, please refer to “Personalization datasheet”.

## 1.7 INFORMATION OF USED MATERIALS


<b>Back side adhesive</b>	Adhesive designed to have excellent adhesion on plastic surfaces, good adhesion on other surfaces.
<b>PET face material</b>	Inkjet and thermal transfer printable. For thermal transfer printing, resin ribbon is recommended.

## 1.8 POSSIBLE APPLICATIONS

<b>Plastic</b>	Plastic crates and other returnable containers which require both correct electrical properties as well as sufficient adhesion to withstand washing
----------------	---


## 2. INSTALLATION INSTRUCTIONS

Following guidelines are valid when installing and using the Confidex Carrier label. Depending of the application, it may be recommendable to use 2 labels in each item to ensure best RF visibility.

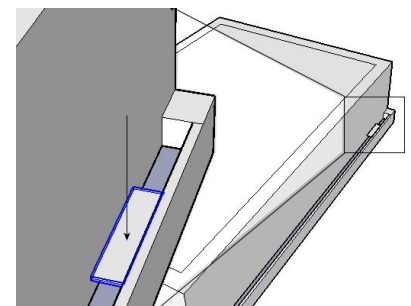

### 2.1 LABEL ORIENTATION AND APPLICATION

Label polarization is along the longest dimension of the label so it should be noticed when the RFID installation is being designed. Label antenna parts should not be in contact with metal to enable best possible performance of the label.



While planning the installation, most recommended location for the Confidex Carrier –label is in a position, where the structure of the identified asset provides protection against mechanical stresses such as impacts or jet streams.

The installation should be done ideally in +20°C/50%RH conditions. For exceptional conditions, please contact Confidex. The adhesive of the label has been selected to provide best adhesion in 24 hours after the installation.

During Carrier attachment to the identified asset, please avoid touching the background adhesive. If the Carrier location on the asset needs to be changed, please use a new tag instead of re-placing the used one; the adhesion will suffer from the re-placement.

Confidex Carrier – labels are delivered in roll format which enables the user to



The picture shows the label to be applied underneath the outer rim; the plastic crate is upside down.

personalize the product via RFID equipped printer or applicator before attachment to the identified objects.

## 2.2 PROTECTION OF TAG DURING USAGE

Minimum bending diameter of the Confidex Carrier is defined to be 50mm. Do not bend the label above the limit. Never touch on the location of the IC. IC chip is sensitive electrical component and can be damaged if unexpected pressure is applied on the chip. Try to avoid mechanical impacts to the Confidex Carrier. IC and antenna may be damaged due to mechanical shocks.



### 3. ORDER INFORMATION

Product number	Product name
3000253	Carrier NXP G2XM

For additional information and technical support contact Confidex Ltd.

#### FINLAND

Confidex Ltd.  
Haarlankatu 1 B, 33230 Tampere, Finland  
Tel. +358 10 4244 100 Fax. +358 10 4244 110  
contact@confidex.fi www.confidex.fi

#### USA

Confidex Inc.  
1502 Fair Weather Ct., Apex, NC 27523, USA  
Tel. +1 919 349 5607 fax +1 810 958 0515  
www.confidex.net

#### CHINA

Confidex China  
2F, Building A3, Guangzhou Science Enterprise Accelerator  
No.11, Kai Yuan Rd, Guangzhou Economy Development Zone  
Guangzhou 510530  
People's Republic of China  
Tel. +86 20 3205 7361 fax +86 20 3205 1429  
www.confidex.net

#### DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions.

Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.